

Heat-Resistant Special Wheels and Castors for the Bakery Industry





Heat-Resistant Wheels "baker compact"







LINE "PHG100HI" "PHBB100HI"
"PHK100HI"

Wheel:

High-quality phenolic wheels, combined with special fibers, **trackless**.

Available with plain bore, temp ball bearings and HT selflube bushes.

The wheels are heat-resistant from -40°C up to +280°C with peaks of 300°C.

Article no. Wheels	Axle- tube- code	 mm	 mm	 mm	 mm	 kg	weight of pc. kg	
PHG080HI	1	080	35	12	40	150	0,170	<input type="checkbox"/>
PHBB080/10HI	2	080	35	10	45	150	0,175	<input type="checkbox"/>
PHK080HI	3	100	35	12	40	150	0,220	<input checked="" type="checkbox"/>
PHG100HI	1	100	35	12	40	170	0,245	<input type="checkbox"/>
PHGS100HI	1	100	35	12	40	180	0,300	<input type="checkbox"/>
PHBB100/10HI	2	100	35	10	45	170	0,250	<input type="checkbox"/>
PHBB100/40/10HI	1	100	35	10	40	170	0,245	<input type="checkbox"/>
PHK100HI	3	100	35	12	40	170	0,300	<input checked="" type="checkbox"/>
PHG125/15HI	4	125	40	15	49	250	0,540	<input type="checkbox"/>
PHG125/20HI	4	125	40	20	49	250	0,530	<input type="checkbox"/>
PHG150HI	5	150	45	20	58	300	0,840	<input type="checkbox"/>
PHG160HI	5	160	50	20	58	340	1,000	<input type="checkbox"/>
PHG200HI	5	200	50	20	58	370	1,610	<input type="checkbox"/>

Under unfavourable application conditions the wheels with plain bore "PHG..." can potentially squeak. Therefore we advise for this wheels our INOX-axle-tubes LINE "NARB..." with special **HQS-coating**.



fitting axle-tubes for our wheels:

Article no. axle-tubes	Axle- tube- code	outside - Ø mm	length mm	fitting for bolts	material	fitting for bearing
NAR10X1,0X46	2	10,0	46	M8	INOX	<input type="checkbox"/>
NAR11,9X1,5X42	3	11,9	42	M8	INOX	<input checked="" type="checkbox"/>
NAR11,9X1,5X46	3	11,9	46	M8	INOX	<input checked="" type="checkbox"/>
NARB12/8X41	1	12,0	41	M8	INOX/HQS	<input type="checkbox"/>
NAR12X1,5X41	1	12,0	41	M8	INOX	<input type="checkbox"/>
NAR12X1,5X42	1	12,0	42	M8	INOX	<input type="checkbox"/>
NAR15X1X51	4	15,0	51	M12	INOX	<input type="checkbox"/>
NAR15X2X51	4	15,0	51	M10	INOX	<input type="checkbox"/>
NAR20X3X51	4	20,0	51	M12	INOX	<input type="checkbox"/>
NAR20X3X61	5	20,0	61	M12	INOX	<input type="checkbox"/>

For wheels with **plain bore** we advise the axle-tubes **NARB12/8X41**.

All **BOLD** typed articles are usually available from our stock.

All other articles might also be available on short-term, please just ask.



Heat-Resistant Castors

"baker compact"

LINE „L/PHG...HI“ „B/PHG...HI“

Housing:










Sheet steel housing shiny zined, pivot bearing with double ball ring, screwed axle.

Wheel:

High-quality phenolic wheels, combined with special fibers, **trackless**.

Available with plain bore, temp ball bearings and HT selflube bushes.

The wheels are heat-resistant from -40°C up to +280°C with peaks of 300°C.

Article no. Swivel castors	Article no. with lock	Article no. Fixed castors	 mm	 mm	 mm	 mm	 mm	 mm	 mm	 kg	
L/PHG080HI	L/PHG080HI/F	B/PHG080HI	80	35	105	40	105x 85	80x 60	8,2	150	<input type="checkbox"/>
L/PHBB080HI	L/PHBB080HI/F	B/PHBB080HI	80	35	105	40	105x 85	80x 60	8,2	150	<input type="checkbox"/>
L/PHK080HI	L/PHK080HI/F	B/PHK080HI	80	35	105	40	105x 85	80x 60	8,2	150	<input checked="" type="checkbox"/>
L/PHG100HI	L/PHG100HI/F	B/PHG100HI	100	35	125	40	105x 85	80x 60	8,2	170	<input type="checkbox"/>
L/PHBB100HI	L/PHBB100HI/F	B/PHBB100HI	100	35	125	40	105x 85	80x 60	8,2	170	<input type="checkbox"/>
L/PHK100HI	L/PHK100HI/F	B/PHK100HI	100	35	125	40	105x 85	80x 60	8,2	170	<input checked="" type="checkbox"/>
L/PHG125HI	L/PHG125HI/F	B/PHG125HI	125	40	150	42	105x 85	80x 60	8,2	200	<input type="checkbox"/>
L3/PHG125HI	L3/PHG125HI/F	B3/PHG125HI	125	40	155	44	135x110	105x 80	10,2	250	<input type="checkbox"/>
L/PHG150HI	L/PHG150HI/F	B/PHG150HI	150	45	185	49	135x110	105x 80	10,2	300	<input type="checkbox"/>
L/PHG200HI	L/PHG200HI/F	B/PHG200HI	200	50	235	50	135x110	105x 80	10,2	370	<input type="checkbox"/>



Heat-resistant castors

"baker - compact"







LINE „LR/PHG...HI“

Housing:

see above, but with passing by hole 12,2 mm.

Wheel:

see above

Article no. Swivel castors	Article no. with lock	 mm	 mm	 mm	 mm	passing-by hole Ø mm	 kg	
LR/PHG080HI	LR/PHG080HI/F	80	35	102	40	12,2	100	<input type="checkbox"/>
LR/PHBB080HI	LR/PHBB080HI/F	80	35	102	40	12,2	100	<input type="checkbox"/>
LR/PHK080HI	LR/PHK080HI/F	80	35	102	40	12,2	100	<input checked="" type="checkbox"/>
LR/PHG100HI	LR/PHG100HI/F	100	35	123	40	12,2	100	<input type="checkbox"/>
LR/PHBB100HI	LR/PHBB100HI/F	100	35	123	40	12,2	100	<input type="checkbox"/>
LR/PHK100HI	LR/PHK100HI/F	100	35	123	40	12,2	100	<input checked="" type="checkbox"/>
LR/PHG125HI	LR/PHG125HI/F	125	40	145	42	12,2	100	<input type="checkbox"/>
LR/PHG150HI	LR/PHG150HI/FV*	150	45	185	49	12,2	300	<input type="checkbox"/>
LR/PHG200HI	LR/PHG200HI/FV*	200	50	231	50	12,2	300	<input type="checkbox"/>

* FV = lock in forerun

All **BOLD** typed articles are usually available from our stock.

All other articles might also be available on short-term, please just ask.



Heat-Resistant Castors

"baker compact"

LINE „LN/PHG...HI“ „BN/PHG...HI“
LINE „LRN/PHG...HI“

Housing:




















Solid housing made of stainless chrome nickel steel, pivot bearing double ball ring, locking device springs made of double coated steel, screwed axle.

Wheel:

High-quality phenolic wheels, combined with special fibers, **trackless**.

Available with plain bore, temp ball bearings and HT selflube bushes.

The wheels are heat-resistant from -40°C up to +280°C with peaks of 300°C.

Article no. Swivel castors	Article no. with lock	Article no. Fixed castors									
LN/PHG080HI	LN/PHG080HI/F	BN/PHG080HI	80	35	105	40	105x 85	80x 60	8,2	150	
LN/PHBB080HI	LN/PHBB080HI/F	BN/PHBB080HI	80	35	105	40	105x 85	80x 60	8,2	150	
LN/PHK080HI	LN/PHK080HI/F	BN/PHK080HI	80	35	105	40	105x 85	80x 60	8,2	150	
LN/PHG100HI	LN/PHG100HI/F	BN/PHG100HI	100	35	125	40	105x 85	80x 60	8,2	170	
LN/PHBB100HI	LN/PHBB100HI/F	BN/PHBB100HI	100	35	125	40	105x 85	80x 60	8,2	170	
LN/PHK100HI	LN/PHK100HI/F	BN/PHK100HI	100	35	125	40	105x 85	80x 60	8,2	170	
LN/PHG125HI	LN/PHG125HI/F	BN/PHG125HI	125	40	150	42	105x 85	80x 60	8,2	200	
LN3/PHG125HI	LN3/PHG125HI/F	BN3/PHG125HI	125	40	155	44	135x110	105x 80	10,2	250	
LN/PHG150HI	LN/PHG150HI/F	BN/PHG150HI	150	45	185	49	135x110	105x 80	10,2	300	
LN/PHG200HI	LN/PHG200HI/F	BN/PHG200HI	200	50	235	50	135x110	105x 80	10,2	370	



Heat-resistant castors

"baker - compact"
















LINE „LRN/PHG...HI“

Housing:

see above, but with passing by hole 12,2 mm.

Wheel:

see above

Article no. Swivel castors	Article no. with lock					passing-by hole Ø mm		
LRN/PHG080HI	LRN/PHG080HI/F	80	35	102	40	12,2	100	
LRN/PHBB080HI	LRN/PHBB080HI/F	80	35	102	40	12,2	100	
LRN/PHK080HI	LRN/PHK080HI/F	80	35	102	40	12,2	100	
LRN/PHG100HI	LRN/PHG100HI/F	100	35	123	40	12,2	100	
LRN/PHBB100HI	LRN/PHBB100HI/F	100	35	123	40	12,2	100	
LRN/PHK100HI	LRN/PHK100HI/F	100	35	123	40	12,2	100	
LRN/PHG125HI	LRN/PHG125HI/F	125	40	145	42	12,2	100	
LRN/PHG150HI	LRN/PHG150HI/F	150	45	185	49	12,2	300	
LRN/PHG200HI	LRN/PHG200HI/F	200	50	231	50	12,2	300	

All **BOLD** typed articles are usually available from our stock.

All other articles might also be available on short-term, please just ask.















INOX - Heat-Resistat Castors
LINE "Stepless" with Wheels from
LINE "baker compact"
LINE „LNOK/PHG100HI“

Housing:

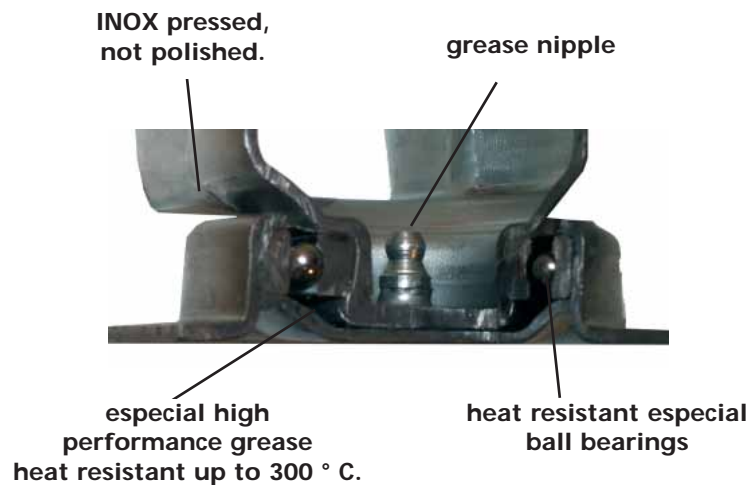
Solid housing made of stainless chrome nickel steel, screwed axle, with plate. **Pivot bearing closed, with ball bearing, heat-resistant grease and lubrication nipple, nearly free from float. Long lasting and maintenance-free!**

Wheel:

High-quality phenolic wheels, combined with special fibers, trackless. Available with plain bore, temp ball bearings and HT selflube bushes. The wheels are heat-resistant from -40°C up to +280°C with peaks of 300°C.

Article no. Swivel castors	Article no. Fixed castors	 mm	 mm	 mm	 mm	 mm	 mm	 mm	 kg	
LNOK/PHG100HI	BNOK/PHG100HI	100	35	130	39	105x 85	80x 60	8,2	170	
LNOK/PHBB100HI	BNOK/PHBB100HI	100	35	130	39	105x 85	80x 60	8,2	170	
LNOK/PHK100HI	BNOK/PHK100HI	100	35	130	39	105x 85	80x 60	8,2	170	

All **BOLD** typed articles are usually available from our stock.
 All other articles might also be available on short-term, please just ask.



Heat-Resistant Wheels "baker special"

LINE "PHG100SHI" und "PHG100WHI"














Wheel:

Made of high quality plastic in a special composition. Model **colour natural(W)** or **black(S)**. Available with plain bore, temp ball bearings and HT selflube bushes.

This wheels are featuring to a extreme high abrasion resistance and have already without bushes a very high quietness in the range of axle.

The wheels are heat-resistant from -40°C up to +270°C with peaks of 280°C.

The load capacity is up to 200 kg.

Article no. Wheels	Axle- tube- code	 mm	 mm	 mm	 mm	 kg	weight of pc. kg	
PHG100SHI	1	100	30	12	40	200	0,155	
PHBB100/10SHI	2	100	30	10	45	200	0,160	
PHK100SHI	3	100	30	12	40	200	0,248	
PHG100WHI	1	100	30	12	40	200	0,155	
PHBB100/10WHI	2	100	30	10	45	200	0,160	

All **BOLD** typed articles are usually available from our stock.
All other articles might also be available on short-term, please just ask.



Heat-Resistant Castors "baker special" LINE „L/PHG..SHI“ „L/PHG..WHI“

Housing:














Sheet steel housing shiny zined, pivot bearing with double ball ring, screwed axle.

Wheel:

Made of high quality plastic in a special composition. Model **colour natural(W)** or **black(S)**.

Available with plain bore and HT selflube bushes.

The wheels are heat-resistant from -40°C up to +270°C with peaks of 280°C.

Article no. Swivel castors	Article no. with lock	Article no. Fixed castors									
			mm	mm	mm	mm	mm	mm	mm	kg	
L/PHG100SHI	L/PHG100SHI/F	B/PHG100SHI	100	30	125	40	105x 85	80x 60	8,2	200	
L/PHBB100SHI	L/PHBB100SHI/F	B/PHBB100SHI	100	30	125	40	105x 85	80x 60	8,2	200	
L/PHG100WHI	L/PHG100WHI/F	B/PHG100WHI	100	30	125	40	105x 85	80x 60	8,2	200	
L/PHBB100WHI	L/PHBB100WHI/F	B/PHBB100WHI	100	30	125	40	105x 85	80x 60	8,2	200	













Heat-resistant castors "baker - special" LINE „LR/PHG..SHI“ „LR/PHG..WHI“

Housing:

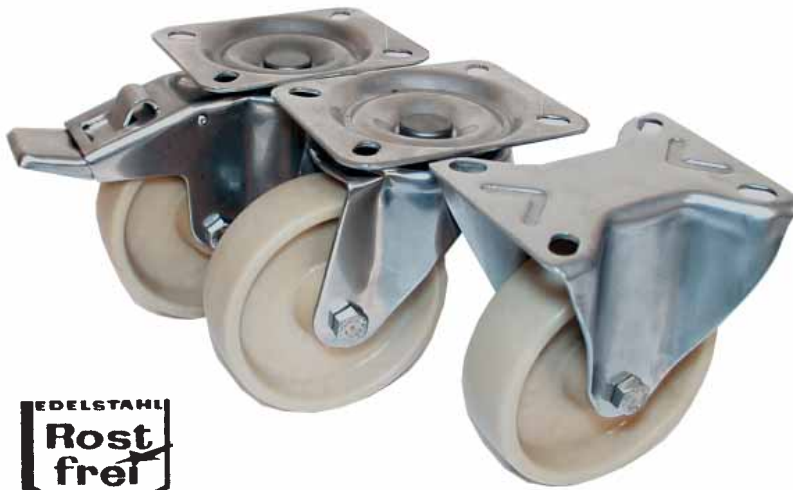
see above, but with passing by hole 12,2 mm.

Wheel:

see above

Article no. Swivel castors	Article no. with lock					passing-by hole Ø mm		
		mm	mm	mm	mm		kg	
LR/PHG100SHI	LR/PHG100SHI/F	100	30	123	40	12,2	100	
LR/PHBB100SHI	LR/PHBB100SHI/F	100	30	123	40	12,2	100	
LR/PHG100WHI	LR/PHG100WHI/F	100	30	123	40	12,2	100	
LR/PHBB100WHI	LR/PHBB100WHI/F	100	30	123	40	12,2	100	

All **BOLD** typed articles are usually available from our stock.
All other articles might also be available on short-term, please just ask.



Heat-Resistant Castors "baker special"

LINE „LN/PHG..SHI“ „LN/PHG..WHI“
Housing:











Solid housing made of stainless chrome nickel steel, pivot bearing double ball ring, locking device springs made of double coated steel, Screwed axle.

Wheel:

Made of high quality plastic in a special composition. Model **colour natural(W)** or **black(S)**.

Available with plain bore and HT selflube bushes.

The wheels are heat-resistant from -40°C up to +270°C with peaks of 280°C.

Article no. Swivel castors	Article no. with lock	Article no. Fixed castors										
LN/PHG100SHI	LN/PHG100SHI/F	BN/PHG100SHI	100	30	125	40	105x 85	80x 60	8,2	200	<input type="checkbox"/>	
LN/PHBB100SHI	LN/PHBB100SHI/F	BN/PHBB100SHI	100	30	125	40	105x 85	80x 60	8,2	200	<input type="checkbox"/>	
LN/PHG100WHI	LN/PHG100WHI/F	BN/PHG100WHI	100	30	125	40	105x 85	80x 60	8,2	200	<input type="checkbox"/>	
LN/PHBB100WHI	LN/PHBB100WHI/F	BN/PHBB100WHI	100	30	125	40	105x 85	80x 60	8,2	200	<input type="checkbox"/>	

Heat-Resistant Castors "baker special"

LINE „LRN/PHG..SHI“ „LRN/PHG..WHI“







Housing:

see above, but with passing by hole 12,2 mm.

Wheel:

see above



Article no. Swivel castors	Article no. with lock					passing-by hole Ø mm		
LRN/PHG100SHI	LRN/PHG100SHI/F	100	30	123	40	12,2	100	<input type="checkbox"/>
LRN/PHBB100SHI	LRN/PHBB100SHI/F	100	30	123	40	12,2	100	<input type="checkbox"/>
LRN/PHG100WHI	LRN/PHG100WHI/F	100	30	123	40	12,2	100	<input type="checkbox"/>
LRN/PHBB100WHI	LRN/PHBB100WHI/F	100	30	123	40	12,2	100	<input type="checkbox"/>

All **BOLD** typed articles are usually available from our stock.
All other articles might also be available on short-term, please just ask.



INOX - Heat-Resistant Castors
LINE "Stepless" with Wheels from
LINE "baker special"
LINE „LNOK/PHG100SHI“















Housing:

Solid housing made of stainless chrome nickel steel, screwed axle, with plate. **Pivot bearing closed, with ball bearing, heat-resistant grease and lubrication nipple, nearly free from float. Long lasting and maintenance-free!**

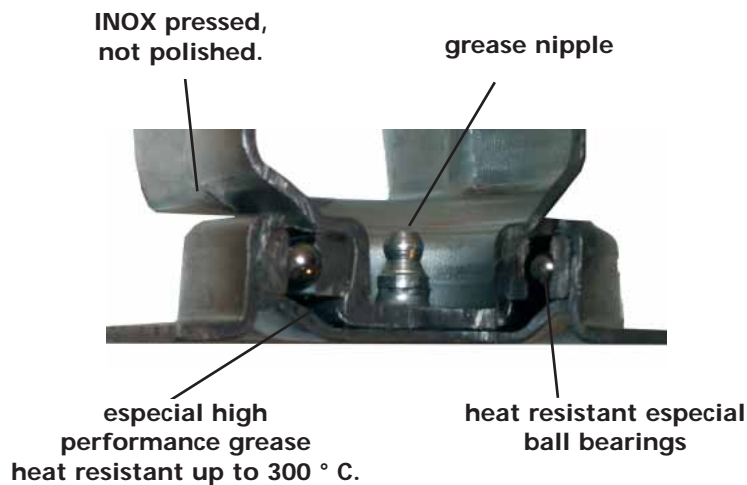
Wheel:

Made of high quality plastic in a special composition. Model **colour natural(W)** or **black(S)**.

Available with plain bore and HT selflube bushes. The wheels are heat-resistant from **-40°C up to +270°C with peaks of 280°C.**

Article no. Swivel castors	Article no. Fixed castors	 mm	 mm	 mm	 mm	 mm	 mm	 mm	 mm	 kg		
LNOK/PHG100SHI	BNOK/PHG100SHI	100	30	130	39	105x	85	80x	60	8,2	200	
LNOK/PHBB100SHI	BNOK/PHBB100SHI	100	30	130	39	105x	85	80x	60	8,2	200	
LNOK/PHG100WHI	BNOK/PHG100WHI	100	30	130	39	105x	85	80x	60	8,2	200	
LNOK/PHBB100WHI	BNOK/PHBB100WHI	100	30	130	39	105x	85	80x	60	8,2	200	

All **BOLD** typed articles are usually available from our stock.
 All other articles might also be available on short-term, please just ask.





Heat-Resistant Rubber Wheels "baker silent" LINE „VPHG100HI“











Wheel body:

High-quality phenolic material, combined with special fibers. Available with plain bore, temp ball bearings and HT selflube bushes.

Reifen:

Made of **heat rubber**, **mechanically non detachably fixed** with the wheel body. Colour black, **trackless**, tearproof, **silent running**, very small rolling friction.

The wheels are heat-resistant from -40°C up to +250°C.

Article no. Wheels	Axle- tube- code	 mm	 mm	 mm	 mm	 kg	weight of pc. kg	
VPHG100HI	1	100	30	12	40	110	0,230	
VPHBB100/10HI	2	100	30	10	45	110	0,235	
VPHBB100/40/10HI	1	100	30	10	40	110	0,230	
VPHK100HI	2	100	30	12	40	110	0,290	

Under unfavourable application conditions the wheels with plain bore "PHG..." can potentially squeak. Therefore we advise for this wheels our INOX-axle-tubes LINE "NARB..." with special **HQS-coating**.

The wheels are appropriate for a continuous use of 30 minutes under maximally 250° C with a cooling phase of 30 minutes, following on it, at ambient temperature.

All **BOLD** typed articles are usually available from our stock.
All other articles might also be available on short-term, please just ask.

Construction of tothing on the rim.
With it we reach the **mechanically non detachably compound with the wheel body.**





Heat-Resistant Castors

“baker silent”

LINE „L/VPHG...HI“ „B/VPHG...HI“













Housing:

Sheet steel housing shiny zined, pivot bearing with double ball ring, screwed axle.

Wheel:

Made of high-quality phenolic rim with **heat rubber**, **mechanical non detachably fixed** with the wheel body. Colour black, **trackless**, tearproof, **silent running**, very small rolling friction.

The wheels are heat-resistant from -40°C up to +250°C

Article no. Swivel castors	Article no. with lock	Article no. Fixed castors	 mm	 mm	 mm	 mm	 mm	 mm	 mm	 kg	
L/VPHG100HI	L/VPHG100HI/F	B/VPHG100HI	100	30	125	40	105x 85	80x 60	8,2	110	
L/VPHBB100HI	L/VPHBB100HI/F	B/VPHBB100HI	100	30	125	40	105x 85	80x 60	8,2	110	
L/VPHK100HI	L/VPHK100HI/F	B/VPHK100HI	100	30	125	40	105x 85	80x 60	8,2	110	



Heat-resistant castors

“baker - silent”










LINE „LR/VPHG...HI“

Housing:

see above, but with passing by hole 12,2 mm.

Wheel:

see above

Article no. Swivel castors	Article no. with lock	 mm	 mm	 mm	 mm	passing-by hole Ø mm	 kg	
LR/VPHG100HI	LR/VPHG100HI/F	100	30	123	40	12,2	100	
LR/VPHBB100HI	LR/VPHBB100HI/F	100	30	123	40	12,2	100	
LR/VPHK100HI	LR/VPHK100HI/F	100	30	123	40	12,2	100	

All **BOLD** typed articles are usually available from our stock.
All other articles might also be available on short-term, please just ask.

Heat-Resistant Castors "baker silent"

LINE „LN/VPHG...HI“ „BN/VPHG...HI“

Housing:













Solid housing made of stainless chrome nickel steel, pivot bearing double ball ring, locking device springs made of double coated steel, Screwed axle.

Wheel:

Made of high-quality phenolic rim with **heat rubber, mechanical non detachably fixed** with the wheel body. Colour black, **trackless**, tearproof, **silent running**, very small rolling friction.

The wheels are heat-resistant from -40°C up to +250°C



Article no. Swivel castors	Article no. with lock	Article no. Fixed castors	 mm	 mm	 mm	 mm	 mm	 mm	 mm	 kg	
LN/VPHG100HI	LN/VPHG100HI/F	BN/VPHG100HI	100	30	125	40	105x 85	80x 60	8,2	110	
LN/VPHBB100HI	LN/VPHBB100HI/F	BN/VPHBB100HI	100	30	125	40	105x 85	80x 60	8,2	110	
LN/VPHK100HI	LN/VPHK100HI/F	BN/VPHK100HI	100	30	125	40	105x 85	80x 60	8,2	110	

Heat-resistant castors "baker - silent"

LINE „LRN/VPHG...HI“










Housing:

see above, but with passing by hole 12,2 mm.

Wheel:

see above



Article no. Swivel castors	Article no. with lock	 mm	 mm	 mm	 mm	passing-by hole Ø mm	 kg	
LRN/PHG100HI	LRN/PHG100HI/F	100	30	123	40	12,2	100	
LRN/PHBB100HI	LRN/PHBB100HI/F	100	30	123	40	12,2	100	
LRN/PHK100HI	LRN/PHK100HI/F	100	30	123	40	12,2	100	

All **BOLD** typed articles are usually available from our stock.
All other articles might also be available on short-term, please just ask.















INOX - Heat-Resistant Castors
LINE "Stepless" with Wheels from
LINE "baker silent"
LINE "LNOK/VPHG100HI"

Housing:

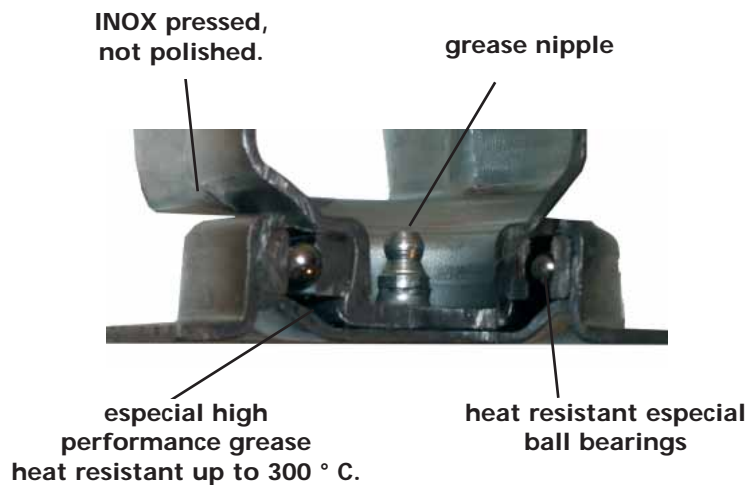
Solid housing made of stainless chrome nickel steel, screwed axle, with plate. **Pivot bearing closed, with ball bearing, heat-resistant grease and lubrication nipple, nearly free from float. Long lasting and maintenance-free!**

Wheel:

Made of high-quality phenolic rim with **heat rubber, mechanical non detachably fixed** with the wheel body. Colour black, **trackless, tearproof, silent running**, very small rolling friction. The wheels are heat-resistant from **-40°C up to +250°C**

Article no. Swivel castors	Article no. Fixed castors	 mm	 mm	 mm	 mm	 mm	 mm	 mm	 kg	
LNOK/VPHG100HI	BNOK/VPHG100HI	100	30	130	39	105x 85	80x 60	8,2	110	
LNOK/VPHBB100HI	BNOK/VPHBB100HI	100	30	130	39	105x 85	80x 60	8,2	110	
LNOK/VPHK100HI	BNOK/VPHK100HI	100	30	130	39	105x 85	80x 60	8,2	110	

All **BOLD** typed articles are usually available from our stock.
 All other articles might also be available on short-term, please just ask.












Extremely Heat-Resistant Wheels "baker extrem" LINE "PHG100XHI"



Wheel:

High-quality phenolic wheels, combined with special fibers, **trackless**, Farbe rot. Available with plain bore, temp ball bearings and HT selflube bushes. This wheels are featuring to a **extreme high heat resistance**.

The wheels are heat-resistant from -40°C up to +350°C with peaks of 400°C.

Article no. Wheels	Axle- tube- code	 mm	 mm	 mm	 mm	 kg	weight of pc. kg	
PHG100XHI	1	100	35	12	40	250	0,230	
PHBB100/10XHI	2	100	35	10	45	250	0,235	
PHK100XHI *	3	100	35	12	40	250	0,340	

Under unfavourable application conditions the wheels with plain bore "PHG..." can potentially squeak. Therefore we advise for this wheels our INOX-axle-tubes LINE "NARB..." with special **HQS-coating**.

All of this wheels also are available as swivel castors.
Please ask us for your needs.

* The wheels PHK100XHI are available on request about 500 pc. minimum.

All **BOLD** typed articles are usually available from our stock.
All other articles might also be available on short-term, please just ask.